



HOT WATER HEATING COILS

IN STOCK

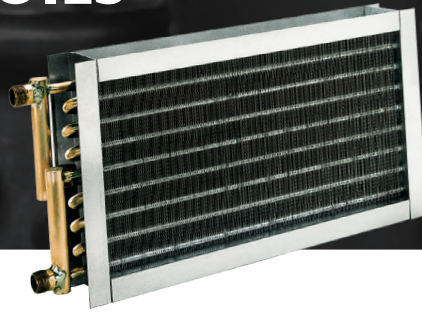

MAIOCCO & ASSOCIATES

HEAT TRANSFER SOLUTIONS | WWW.HXCOILS.COM

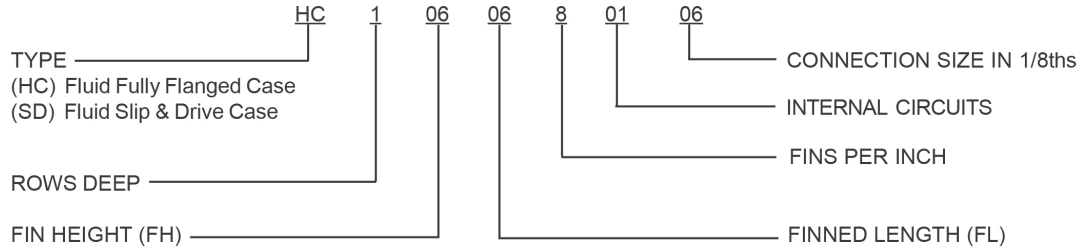


HC / SD MODELS (Coils listed with dimensions are kept in stock)

Model #	HC Dimensions			Approx. Ship Wt. lbs.	SD Dimensions			Approx. Ship Wt. lbs.
	C	A	J		C	A	J	
* 1 06 06 8 01 06	2.25	2.00	1.50	4	0.88	2.75	3.00	5
* 1 06 09 8 01 06	2.25	2.00	1.50	6	0.88	2.75	3.00	5
* 1 06 12 8 01 06	2.25	2.00	1.50	8	0.88	2.75	3.00	6
* 1 06 15 8 01 06	2.25	2.00	1.50	8				
* 1 09 09 8 01 06	2.25	2.00	1.50	8	0.88	2.75	3.00	6
* 1 09 12 8 01 06	2.25	2.00	1.50	8	0.88	2.75	3.00	8
* 1 09 15 8 01 06	2.25	2.00	1.50	8	0.88	2.75	3.00	9
* 1 09 18 8 01 06	2.25	2.00	1.50	10	0.88	2.75	3.00	10
* 1 12 12 8 01 06	2.25	2.00	1.50	10	0.88	2.75	3.00	9
* 1 12 15 8 01 06	2.25	2.00	1.50	11	0.88	2.75	3.00	10
* 1 12 18 8 01 06	2.25	2.00	1.50	12	0.88	2.75	3.00	12
* 1 12 24 8 01 06	2.25	2.00	1.50	15	0.88	2.75	3.00	14
* 1 12 30 8 01 06	2.25	2.00	1.50	16	0.88	2.75	3.00	17
* 1 12 36 8 02 08	2.38	1.31	3.06	20				
* 1 15 18 8 01 06	2.25	2.00	1.50	14	0.88	2.75	3.00	13
* 1 15 24 8 01 06	2.25	2.00	1.50	18	0.88	2.75	3.00	16
* 1 15 30 8 02 08	2.38	1.31	3.06	20				
* 1 15 36 8 02 08	2.38	1.31	3.06	24				
* 1 18 18 8 01 06	2.25	2.00	1.50	16	0.88	2.75	3.00	16
* 1 18 24 8 02 08	2.38	1.31	3.06	20	1.05	2.06	4.56	21
* 1 18 30 8 02 08	2.38	1.31	3.06	24	1.05	2.06	4.56	24
* 1 18 36 8 02 08	2.38	1.31	3.06	28				
* 1 18 42 8 03 08	2.38	1.31	3.06	34				
* 1 18 48 8 03 08	2.38	1.31	3.06	38				
* 1 21 30 8 02 08	2.38	1.31	3.06	26				
* 1 21 36 8 03 08	2.38	1.31	3.06	34				
* 1 21 48 8 04 08	2.38	1.31	3.06	38				
* 1 24 24 8 02 08	2.38	1.31	3.06	24				
* 1 24 30 8 03 08	2.38	1.31	3.06	30				
* 1 24 36 8 04 08	2.38	1.31	3.06	34				
* 1 24 48 8 04 10	2.50	1.19	3.42	44				
* 1 24 60 8 04 10	2.55	1.19	3.42	54				
* 1 27 54 8 05 10				148	1.22	1.94	4.92	52
* 1 30 48 8 05 10	2.55	1.19	3.42	130				
* 1 30 60 8 05 12	2.30	1.06	3.42	163	1.22	1.94	4.92	142


Model #	HC Dimensions			Approx. Ship Wt. lbs.	SD Dimensions			Approx. Ship Wt. lbs.
	C	A	J		C	A	J	
* 2 06 06 8 01 06	1.88	1.35	1.50	4				
* 2 06 09 8 01 06	1.88	1.35	1.50	6	0.50	2.10	3.00	6
* 2 06 12 8 01 06	1.88	1.35	1.50	8				
* 2 06 18 8 01 06	1.88	1.35	1.50	10				
* 2 09 09 8 01 06	1.88	1.35	1.50	8	0.50	2.10	3.00	8
* 2 09 12 8 01 06	1.88	1.35	1.50	10	0.50	2.10	3.00	10
* 2 09 15 8 01 06	1.88	1.35	1.50	12				
* 2 09 18 8 01 06	1.88	1.35	1.50	12				
* 2 12 12 8 01 06	1.88	1.35	1.50	12	0.50	2.10	3.00	11
* 2 12 15 8 01 06	1.88	1.35	1.50	14	0.50	2.10	3.00	14
* 2 12 18 8 01 06	1.88	1.35	1.50	16	0.50	2.10	3.00	15
* 2 12 24 8 02 08	2.00	1.11	3.06	20	0.94	1.86	4.56	22
* 2 12 30 8 02 08	2.00	1.11	3.06	24				
* 2 12 36 8 02 08	2.00	1.11	3.06	26				
* 2 15 18 8 02 08	2.00	1.11	3.06	20				
* 2 15 24 8 02 08	2.00	1.11	3.06	24	0.94	1.86	4.56	25
* 2 15 30 8 03 08	2.00	1.11	3.08	30				
* 2 15 36 8 03 08	2.00	1.11	3.06	32				
* 2 18 18 8 02 08	2.00	1.11	3.06	22	0.94	1.86	4.56	22
* 2 18 24 8 03 08	2.00	1.11	3.06	28	0.94	1.86	4.56	28
* 2 18 30 8 03 08	2.00	1.11	3.08	32				
* 2 18 36 8 04 10	2.12	1.06	3.42	38				
* 2 18 42 8 06 12	2.25	1.11	3.42	50				
* 2 18 48 8 06 12	2.25	1.06	3.42	52	1.18	1.81	4.92	49
* 2 21 30 8 04 08	2.00	1.11	3.06	36				
* 2 21 36 8 05 10	2.12	1.06	3.42	46	1.06	1.81	4.92	46
* 2 24 24 8 04 08	2.00	1.11	3.06	34				
* 2 24 30 8 04 10	2.12	1.06	3.42	42				
* 2 24 36 8 05 12	2.25	1.06	3.42	56				
* 2 24 48 8 08 12	2.25	1.06	3.42	62				
* 2 24 60 8 08 12	2.25	1.06	3.42	76				

* SD - Slip and Drive Case
HC - Fully Flanged Case

HC - FLUID FULLY FLANGED CASE

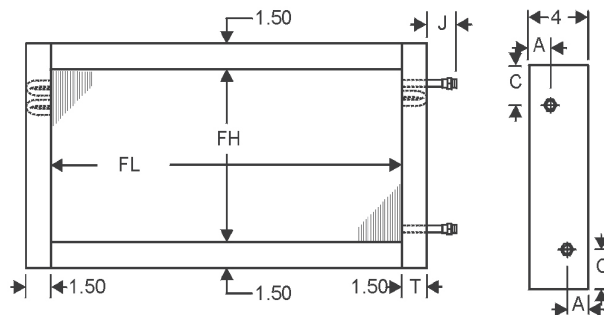

SD - SLIP & DRIVE CASE

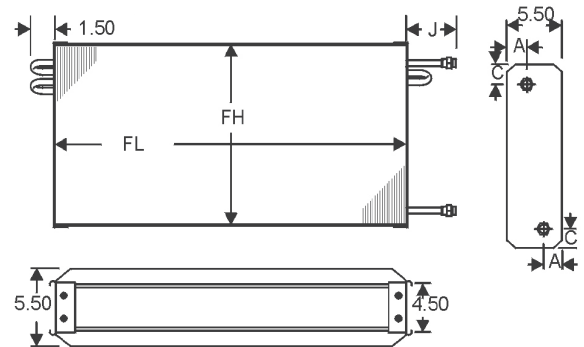

HC / SD FEATURES

- Face area sizes ranging from 6 x 6 to 30 x 60 enable us to meet a wide range of heating and cooling applications
- 2 Casing Styles - Slip & Drive and Fully Flanged
- 5/8" x .020" Seamless Copper Tubes
- .0075" Die Formed Rippled Aluminum Plate Fins

FEATURES

- Same day order shipment - if orders are received by noon
- Wide variety of coil sizes
- Casing styles - Fully flanged cases have 1.50 flanges on all sides
- Casings are constructed of die-formed heavy-gauge continuous galvanized steel for greater strength
- Seamless copper tubes staggered in the direction of airflow to maximize coil performance
- Die Formed Rippled Aluminum Plate Fins with full drawn collars to provide continuous surface contact over the entire tube for maximum heat transfer
- Connections are MPT red brass
- All coils tested under warm water at 315 psig air pressure
- 1-year warranty against defects in material or workmanship