


STEAM COILS



MAIOCCO & ASSOCIATES
HEAT TRANSFER SOLUTIONS | WWW.HXCOILS.COM

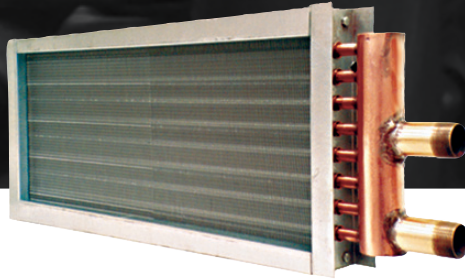

Customer: _____ Model No.: _____

Date: _____

Notes: _____

| DIMENSIONAL DATA IN INCHES | | | | | | | | | | | | | | | | | SUPPLY | | RETURN | |
|----------------------------|-----|------|-----|-----|----|-----|----|-----|----|-----|----|-----|---|-----|---|----|--------|---|--------|---|
| ITEM | QTY | ROWS | FPI | SP1 | FH | SP2 | CH | EP1 | FL | EP2 | CL | MAX | C | OAL | L | CD | S | E | R | F |
| | | | | | | | | | | | | | | | | | | | | |

| PERFORMANCE DATA | CFM | EDB | LFB | CAPACITY | STEAM PRESSURE (PSIG) |
|------------------|-----|-----|-----|----------|-----------------------|
| | | | | | |

| | STEAM COILS | | | | | | | | | | |
|--|---|---------------------------------------|---|--|--------------------------------|--------------------------------|---------------------------------|--------------------------------|-------------------------------|-------------------------------|-------------------------------|
| ROWS AVAILABLE | <input type="checkbox"/> 1 | <input type="checkbox"/> 2 | <input type="checkbox"/> 3 | <input type="checkbox"/> 4 | <input type="checkbox"/> 5 | <input type="checkbox"/> 6 | <input type="checkbox"/> 7 | <input type="checkbox"/> 8 | | | |
| FPI AVAILABLE | <input type="checkbox"/> 4 | <input type="checkbox"/> 5 | <input type="checkbox"/> 6 | <input type="checkbox"/> 7 | <input type="checkbox"/> 8 | <input type="checkbox"/> 9 | <input type="checkbox"/> 10 | <input type="checkbox"/> 11 | <input type="checkbox"/> 12 | <input type="checkbox"/> 13 | <input type="checkbox"/> 14 |
| TUBES OD & WALL THICKNESS (COPPER ONLY) | <input type="checkbox"/> 5/8 | <input type="checkbox"/> .020 | <input type="checkbox"/> .025 | <input type="checkbox"/> .035 | <input type="checkbox"/> .049 | | | | | | |
| FINS MATERIAL & THICKNESS | <input type="checkbox"/> ALUM. | <input type="checkbox"/> .006 | <input type="checkbox"/> .008 | <input type="checkbox"/> .010 | <input type="checkbox"/> .016 | | <input type="checkbox"/> COPPER | <input type="checkbox"/> .006 | <input type="checkbox"/> .008 | <input type="checkbox"/> .010 | <input type="checkbox"/> .016 |
| CASING | <input type="checkbox"/> 16 GA. GALV. STEEL | | <input type="checkbox"/> 16 GA. STAINLESS STEEL | | | | | | | | |
| HEADERS COPPER ONLY | <input type="checkbox"/> 5/8 | <input type="checkbox"/> 7/8 | <input type="checkbox"/> 1-1/8 | <input type="checkbox"/> 1-3/8 | <input type="checkbox"/> 1-5/8 | <input type="checkbox"/> 2-1/8 | <input type="checkbox"/> 2-5/8 | <input type="checkbox"/> 3-1/8 | | | |
| TUBE MATERIAL AVAILABLE | <input type="checkbox"/> COPPER | <input type="checkbox"/> CUPRO-NICKEL | <input type="checkbox"/> CARBON STEEL | <input type="checkbox"/> STAINLESS STEEL | | | | | | | |
| CONNECTION SIZES | <input type="checkbox"/> MPT | <input type="checkbox"/> SWEAT | <input type="checkbox"/> FPT | | | | | | | | |
| | <input type="checkbox"/> SUPPLY | <input type="checkbox"/> RETURN | <input type="checkbox"/> CU | <input type="checkbox"/> RED BRASS | <input type="checkbox"/> STL | | | | | | |

FIELD TAKE OFF

